
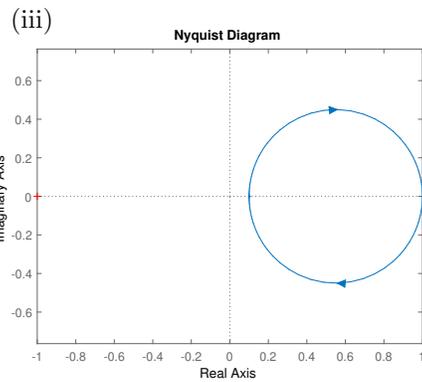
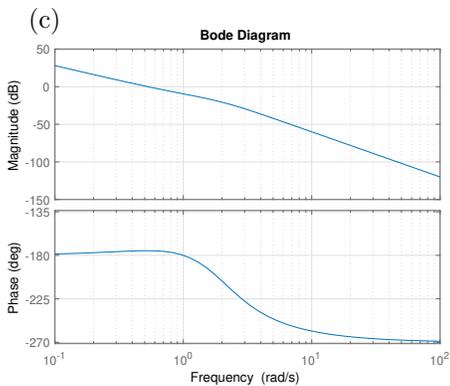
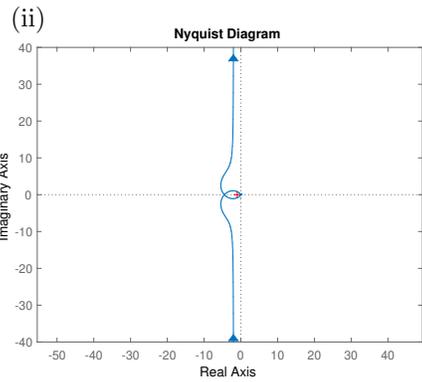
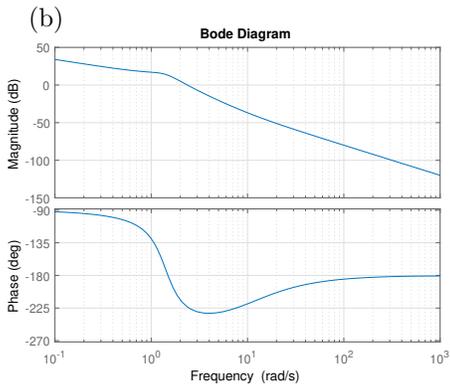
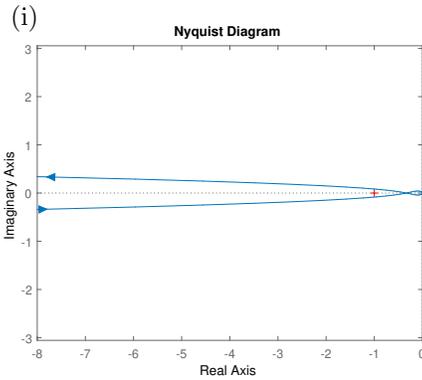


EE363 Automatic Control: Final Exam (4 problems, 75 minutes)

1) *Matching diagrams (10 points)*. You should now be very familiar with the diagrams below. Draw a line to the matching plot that came from the same transfer function. No explanation required.

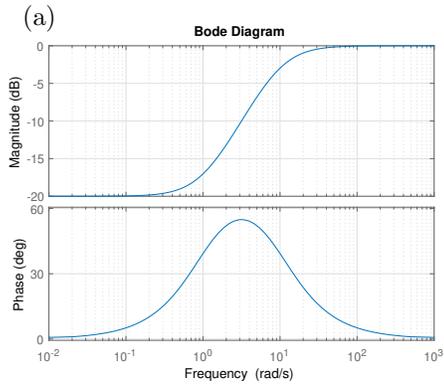


2) *PD control (10 points)*. Consider the following third order plant.

$$G(s) = \frac{1}{s^2(s+1)}$$

With a simple PD controller of the following form with $K_d > 0$,


$$K(s) = K_d s + K_p$$

your job is to identify the set of all stabilizing controllers, *i.e.*, to find the set of all K_p and K_d that stabilizes the following closed loop system.

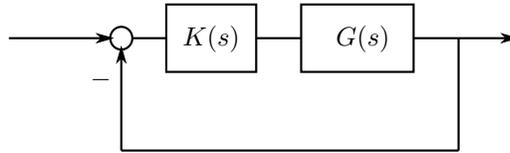

Note that you don't need to find good controllers; you are ok as long as your controllers stabilize the closed loop system.

- Parameterize all stabilizing controllers, *i.e.*, find the conditions under which the closed loop system is stable. Your answer should be in terms of K_p and K_d .
- On the following 2D graph, explicitly shadow the region occupied by the stabilizing controllers.

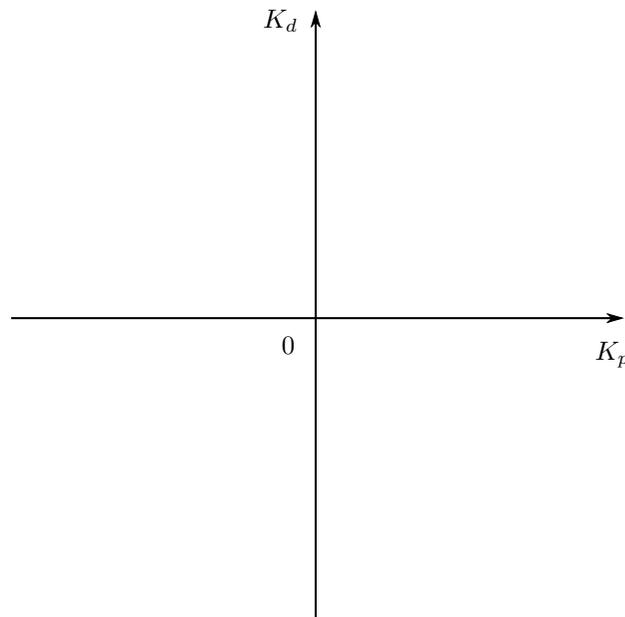


- 3) *Bode plots of a time delay system (10 points).* Although the course focused on working on linear systems, some of the tools that we studied in class can still be applicable to nonlinear systems analysis.

Consider a nonlinear system that defines the time delay of τ , that is, your output is the copy of your input delayed by τ seconds.

$$y(t) = u(t - \tau)$$

For your information, the block diagram with the Laplace transform is given below.



$$G(s) = \frac{Y(s)}{U(s)} = e^{-\tau s}$$

- a) Consider $u(t) = \sin \omega t$. What is the output signal $y(t)$? What is the magnitude amplification and the phase delay of $y(t)$?
- b) Based on your observations, draw the Bode magnitude and the phase plot of $G(s)$.

- 4) *Small systems analysis (10 points)*. A convenient way of describing the *size* of a transfer function is to define a norm. The H_∞ norm of a stable transfer function $G(s)$ is defined as below.

$$\|G(s)\|_\infty = \sup_{\omega \in \mathbb{R}} |G(j\omega)|$$

You may not be familiar with the supremum operator (sup), which is ok. The supremum of a signal gives the least upper bound of the signal, for example,

$$\sup_{x \in \mathbb{R}} (1 - e^{-x}) = 1$$

or

$$\sup_{x \in \mathbb{R}} \left(-\frac{1}{x^2} \right) = 0$$


Hence the supremum operator (sup) is *roughly* equal to the maximum operator (max). For now, you can simply understand that it implies the maximum of something. We will just say

$$\|G(s)\|_\infty = \max_{\omega \in \mathbb{R}} |G(j\omega)|$$

Now the problem. You are given a stable transfer function $G(s)$, whose H_∞ norm is strictly less than 1,

$$\|G(s)\|_\infty < 1$$

and consider a unity negative feedback loop around $G(s)$ as follows.

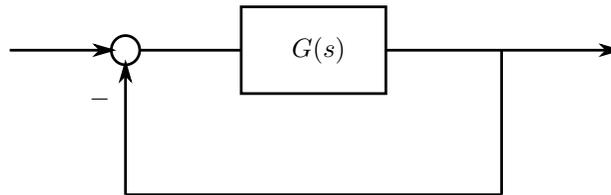

Show that the closed loop system is stable.